
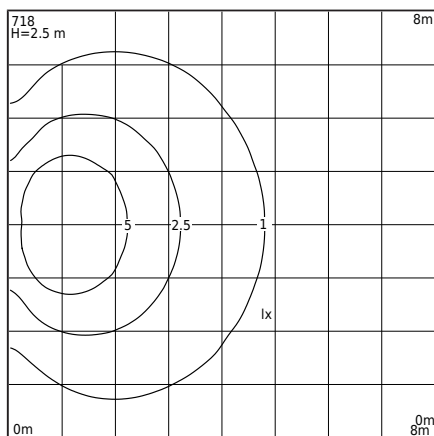
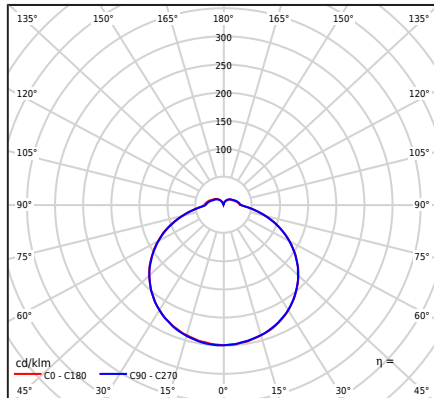


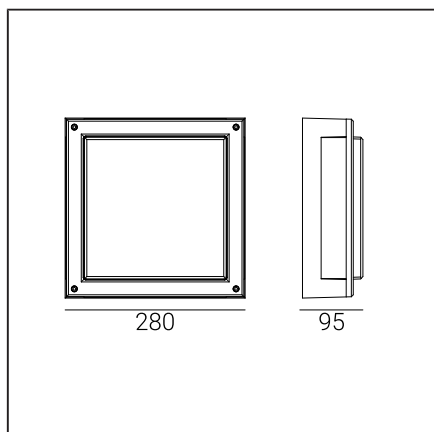

Type of luminaire

Type of luminaire	Wall/ceiling luminaire.
Photometric body	Diffused light.
Characteristics of the luminaire	A ceiling luminaire with a modern design. For lighting private areas and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - milky polycarbonate, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes $\varnothing 5\text{mm}$, spacing 150x170mm
Terminal	Connection terminals: max 3x2.5mm ² , Possibility to connect the luminaire in loops, max 3x1.5mm ² . Round insulated cable with a diameter of $\varnothing 7 \dots 10.5\text{mm}$
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	2,5kg / 2,5kg
Box dimensions [cm]	30,5cm x 30,5cm x 11cm

Technical data

External control	Phase dimmer Lumens LEDAC (User manual)
Luminaire wattage	10W
Luminaire luminous flux	363lm
Efficiency of the luminaire	36,3lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C
Inrush current	150mA/500 μs

Spare parts

06720002	Lampshade.
ZS718zx0013	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
718AL	ALUMINUM	9006
718GR	GRAPHITE	7016
718WH	WHITE	9003