

NORLYS KOSTER 725


AC 220-240V 50-60Hz | IP 54 | LED | No Dim

Koster 725XX0012
02.11.2026 v.12.8
www.norlys.no



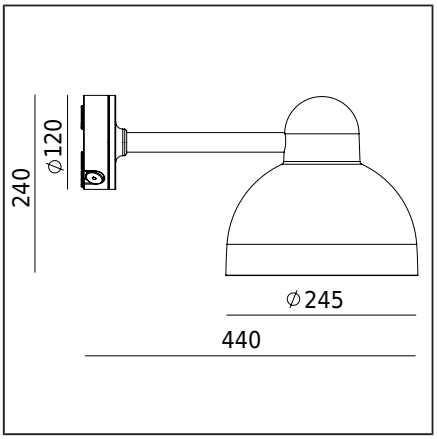

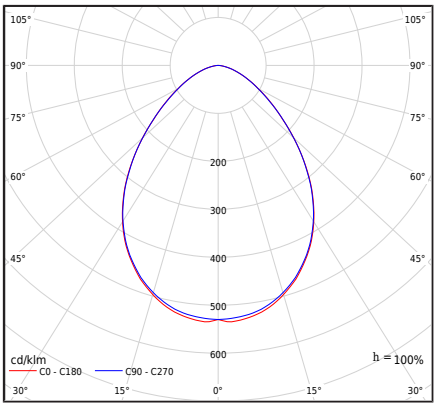

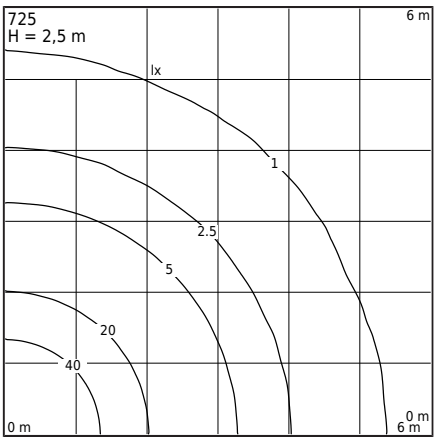

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	Modern design wall-mounted luminaire. Possibility to install on corners of architectural objects.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. EPDM cable gland.
Mounting method	Fixing of the luminaire: 3 holes ø7mm, spacing according to the attached mounting box.
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in loop max 3x1,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	LED module AC integrated
Light control	Non-dimmable fixture
Luminaire weight net / gross	2,86kg / 3,74kg
Box dimensions [cm]	43,5cm x 29cm x 24cm
Luminaire dimensions [cm]	44cm x 24,5cm x 24cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 3K (Datasheet)
Light source wattage	9,5W
Luminaire wattage	9,5W
Lamp luminous flux	1080lm
Luminaire luminous flux	872lm
Efficiency of the luminaire	91,8lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF >0,9
THD factor	< 30%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	2,98A / 34,07µs
BUG rating	B1-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 144, B 16A: 230, C 10A: 239, C 16A: 391

Spare parts

06710000	Lampshade - service kit
46999749	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
725AL	ALUMINUM	9006
725GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.