


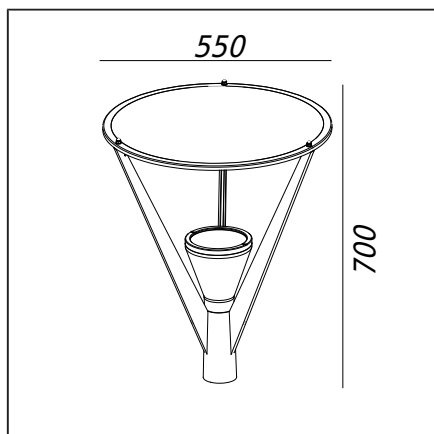

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Indirect symmetrical light.
Characteristics of the luminaire	Surface-mounted luminaire designed to be installed on a lighting pole with a mounting post of Ø60mm.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, transparent. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to Ø60mm lighting pole.
Terminal	4.5 m of H05VV-F 3G1 cable, for connection inside the lighting pole (in an appropriately selected electrical installation box).
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Net / gross weight of luminaire	9,18kg / 11,75kg
Box dimensions [cm]	80cm x 62cm x 62cm
Side area of luminaire	0,1m ²

Technical data

Luminaire wattage	35,5W
ULOR	6,84%
Color temperature	5700K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>50 000h
Power Factor luminaire	PF 0,97
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **A**

Optional version, delivery time upon agreement with the Norlys Sp. z o.o. Sales Department.

Inrush current	18A/250µs
BUG rating	B1-U3-G1

Spare parts

06770000	Lampshade.
08770001	Gasket.
4699100700	LED module.
907770100	Power supply.

Files to download

Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
777BL	BLACK	9005