

NORLYS FIRENZE 8012


AC 220-240V 50-60Hz | IP 54 | E27

Firenze 8012XX0012
16.09.2026 v.12.10
www.norlys.no



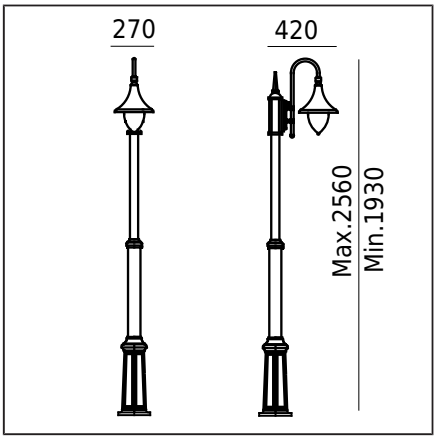

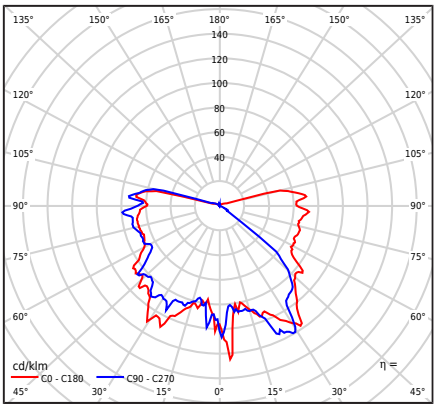

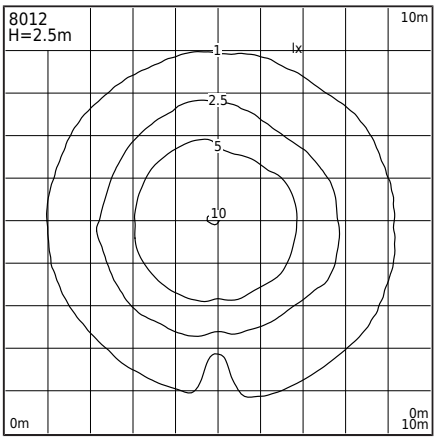

Type of luminaire

Type of luminaire	Pole luminaire (for mounting on the pole)
Photometric body	Light discovered
Characteristics of the luminaire	Classic design luminaire for mounting on a lighting pole. Other accessories need to be purchased separately

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. EPDM cable gland.
Mounting method	Installation of the luminaire in accordance with the manual instruction included
Terminal	Connection terminals for connecting the terminal
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Box dimensions [cm]	41cm x 28cm x 21cm

Technical data

Lamp E27	LED E27 A55..60
Light source wattage	LED max 9W
ULOR	18%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable)

Spare parts

06370797	Lampshade - service kit

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
8012BL	BLACK	9005
8012WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Information on recommended light sources based on manufacturers' data. We are not responsible for the completeness and the validity of the offer, therefore we refer you to the applicable technical information by the manufacturers of light sources. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire