

NORLYS ARVIKA 901


AC 220-240V 50-60Hz | IP 44 | IK 10 | LED | No Dim

Arvika 901XX0010
02.11.2026 v.10.11
www.norlys.no



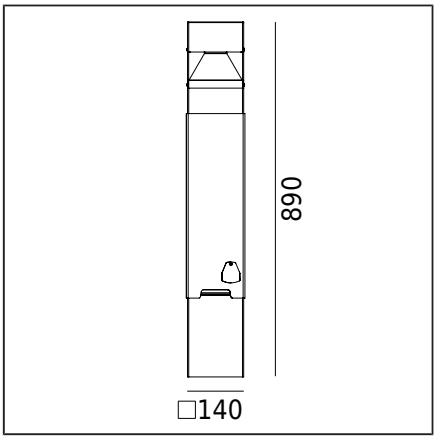

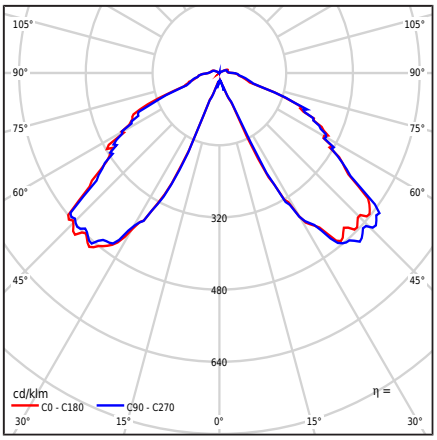

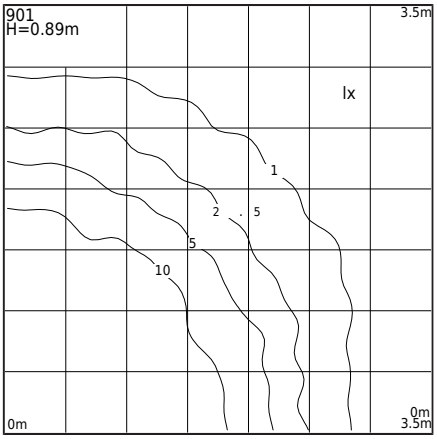

Type of luminaire

Type of luminaire	Post lighting fixture - energy distributor E [Uni].
Photometric body	Four side light distribution covered from the top.
Characteristics of the luminaire	Lamppost fitting and electrical power distributor 220...240V. For lighting private areas and other zones, such as gardens, camping sites, etc. The fitting is equipped with: 1. a replaceable LED module light source, 2. two type E (UNI) sockets, two MCB B 16A circuit breakers, RCCB 30mA residual current device, 3. lighting installation equipped with MCB B 6A circuit breaker.

General information

Materials	Hot-dip galvanized steel. Powder painted steel. Lens - clear polycarbonate, UV stabilized. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø9mm on a diameter of ø85mm every 120° Other accessories must be purchased separately
Terminal	Connection terminals: max 5x4mm² Possibility of connecting the luminaire with loops of max. 5x4mm² Round insulated cable with a maximum diameter of ø20mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	11,94kg / 12,44kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	14cm x 14cm x 89cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	7,4W
Luminaire wattage	8,9W
Lamp luminous flux	1370lm
Luminaire luminous flux	543lm
Efficiency of the luminaire	61lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,85
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optional fixture also available:
- Version: phase dimmable, DALI
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the fixture (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

BUG rating	B0-U2-G0
Comment	The declared IP protection rating of the Arvika Norlys product applies only when the doors covering the electrical sockets are completely closed. During rainfall, it is not allowed to use the sockets, connect devices to them, or leave the doors open. The doors should always be closed properly after use. Before installation, local regulations and requirements regarding the installation and use of light fixtures equipped with electrical sockets should be checked. The possibility of safe installation and operation of the product should be consulted with a person with appropriate electrical qualifications.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations.
Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

Accessories sold separately

208ZX0009	Concreting anchor
207GA0010	Adapter for concrete foundation

Spare parts

4699103102	LED module.
4699200005	Power supply.
ZS901zx0010	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
901BL	BLACK	9005
901GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations.
Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.