


NORLYS MOLDE DC24V DC1903


DC24V | Klasa III | IP 54 | LED

Molde DC24V
1903XX0A09
16.09.2026 v.09.11
www.norlys.no

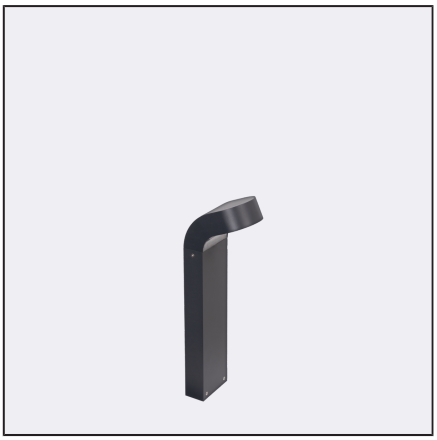

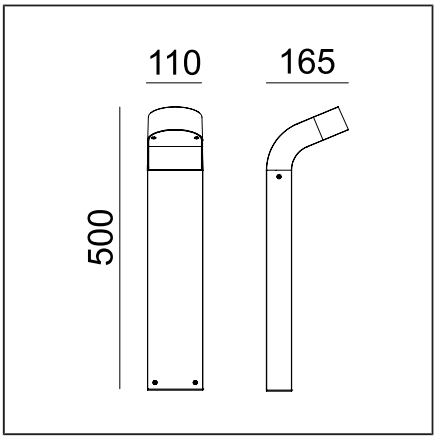

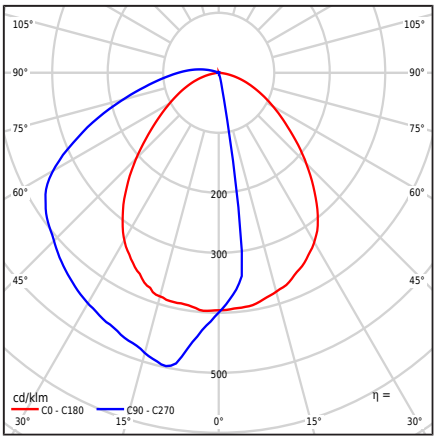

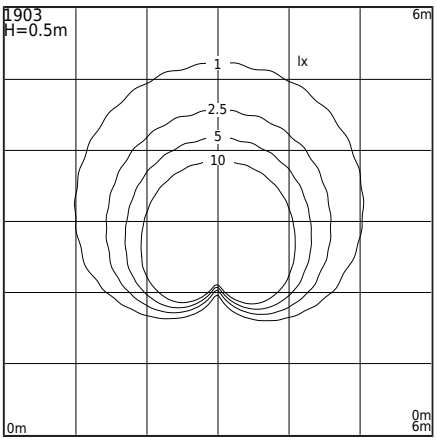

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For lighting private areas and other architectural concepts. The fixture requires an external power supply. LED module is dimmable.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Fixture mounting: 4 holes ø7mm, spacing 18x50mm. Additional accessories must be purchased separately.
Terminal	Terminal clamps: max 2x2.5mm², option to connect the fixture in a loop max 2x1.5mm². Cable in round insulation with a diameter of max ø6...10.5mm.
Type of light source	LED module DC24V, requires an external power source [voltage-stabilized power supply] Replaceable (LED only) light source by a professional.
Light control	Choosing the appropriate power supply and executing the lighting installation should only be carried out by a person with the necessary qualifications and in accordance with current regulations.
Luminaire weight net / gross	1,48kg / 1,8kg
Box dimensions [cm]	51cm x 17cm x 12cm
Luminaire dimensions [cm]	50cm x 16,5cm x 11cm

Technical data

2 LED modules	Cree DK251110 J2835B DC24V 3,6W 3000K (Datasheet)
External control	According to the design.
Light source wattage	7,2W
Luminaire wattage	7,2W
Lamp luminous flux	1064lm
Luminaire luminous flux	505lm
Luminous intensity of the luminaire	252cd
Efficiency of the luminaire	70,1lm/W
ULOR	2,19%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0
Ta Rated temperature	+25°C
Ambient operating temp. range	-30...+50°C

This product contains light sources of energy efficiency class D / EPREL

BUG rating	"B0-U1-G0"

Accessories sold separately

1907ZX0009	Concreting anchor
3081XX0009	Mounting adapter
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
1906ZX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

99ZX0009	Maintenance kit for lighting fixtures
ZN06190001	Lampshade - service kit
ZN1903XX0A09	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, familiarize yourself with the instructions provided with the fixture. The assembly and servicing work must be carried out by a person with the appropriate authorizations and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

MOLDE DC24V DC1903



Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
DC1903AL	ALUMINUM	9006
DC1903BL	BLACK	9005
DC1903CG	CEMENT GREY	7033
DC1903CB	COPPER BROWN	8004
DC1903CS	CORTEN STEEL	approx. 8011
DC1903GR	GRAPHITE	7016
DC1903GB	GREY BEIGE	7006

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, familiarize yourself with the instructions provided with the fixture. The assembly and servicing work must be carried out by a person with the appropriate authorizations and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.