
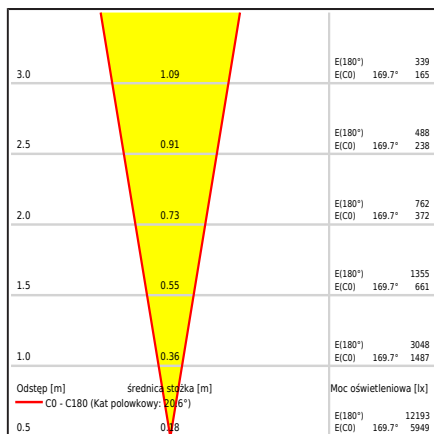
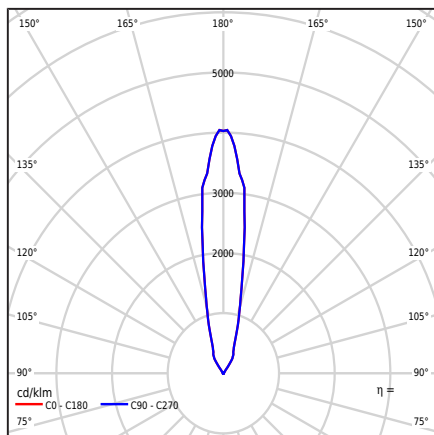


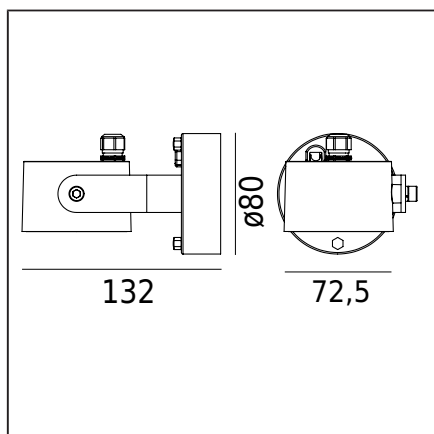

Type of luminaire

Type of luminaire	Wall/ceiling luminaire.
Photometric body	Symmetric light with 24D beam angle
Characteristics of the luminaire	For illuminating gardens, private areas, and other architectural concepts. Ability to adjust the direction of light in the vertical plane. The fixture requires an external power supply. LED module compatible with dimming.

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent.
Mounting method	Fixture mounting: 2 oval holes 5x10mm at 40mm spacing. According to the accompanying installation instructions.
Terminal	The 316IR 3M™ Scotchlok™ electrical crimp connector is used for connecting two or three wires with a cross-section of 0.5 - 1.5mm ² without stripping the insulation from the wires.
Type of light source	LED module DC24V, requires an external power source [voltage-stabilized power supply] Replaceable (LED only) light source by a professional.
Light control	Choosing the appropriate power supply and executing the lighting installation should only be carried out by a person with the necessary qualifications and in accordance with current regulations.
Luminaire weight net / gross	0,4kg / 0,5kg
Box dimensions [cm]	10cm x 10cm x 15cm
Luminaire dimensions [cm]	7,25cm x 8cm x 13,2cm

Technical data

LED module	Cree DK250602 JR5050C DC24V 6,8W 2,7K (⚡ Datasheet)
External control	According to the design.
Light source wattage	6W
Luminaire wattage	6,8W
Lamp luminous flux	880lm
Luminaire luminous flux	730lm
Luminous intensity of the luminaire	2956cd
Efficiency of the luminaire	107,4lm/W
ULOR	100%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>135 500h
LED photobiological threat	RG0 or RG1
Ta Rated temperature	+25°C
Ambient operating temp. range	-30...+50°C

This product contains light source of energy efficiency class **E** / **EPREL**

BUG rating B1-U0-G0

Accessories sold separately

6434XX0009 ⚡	Clamp
6435XX0009 ⚡	Clamp
6436XX0009 ⚡	Clamp
6729XX0009 ⚡	Mounting adapter
145ZX0009 ⚡	Connection box

Files to download

Photometric LDT files	Photometric IES files
Manual	



Indexes

Index	Color	RAL
DC6987BL	BLACK	9005
DC6987CG	CEMENT GREY	7033
DC6987CB	COPPER BROWN	8004
DC6987CS	CORTEN STEEL	approx. 8011
DC6987GR	GRAPHITE	7016
DC6987GB	GREY BEIGE	7006
DC6987ST	STAINLESS STEEL	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.