



# NORLYS ASKER DIPSWITCH CCT-POWER DS1527

Asker DipSwitch
CCT-Power
1527XX0009
14.10.2026 v.09.18
www.norlys.no

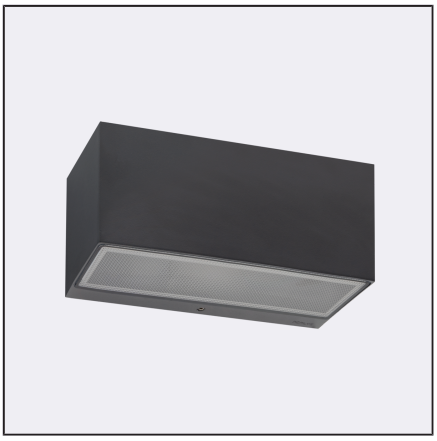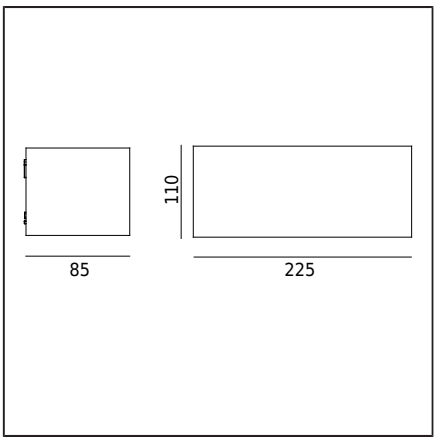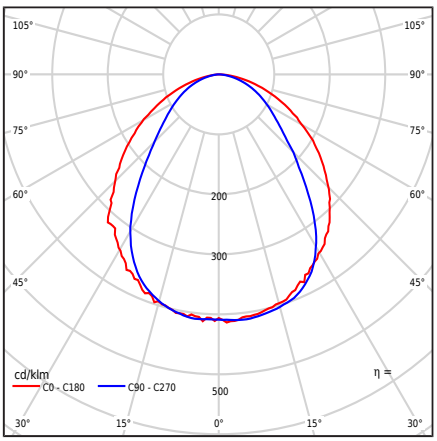

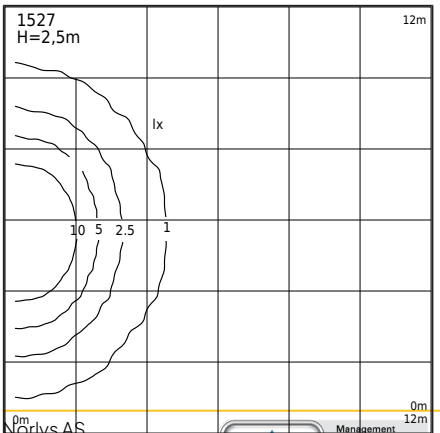


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Single-sided light facing down. |
| Characteristics of the luminaire | A fixture with a wide range of applications, including lighting wall surfaces, facades, and other architectural concepts.<br>1. Adjustable fixture power range:<br>- 4.7W / 6W / 7.1W / 8.5W<br>- factory setting 6W / 344lm<br>- power adjustment via switch on the driver<br>2. Adjustable LED color range:<br>- 2700K / 3000K / 4000K<br>- factory setting 3000K<br>- color adjustment via switch on the driver<br>3. Photometric testing of luminous flux given for values:<br>- 3000K<br>- 8.5W<br>Other values provided in the customer manual. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland. |
| Mounting method | Fixture mounting: 2 holes ø4.5mm spacing 180x60mm.<br>According to the attached installation instructions.<br>Mounting spacers are included with the fixture. |
| Terminal | Terminal clamps: max 3x2.5mm², possibility to connect a loop fixture max 3x1.5mm².<br>Cable in a round sheath with a diameter of ø7...10.5mm. |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Trailing edge (TE) dimming |
| Luminaire weight net / gross | 1,72kg / 1,89kg |
| Box dimensions [cm] | 25,5cm x 14cm x 10cm |
| Luminaire dimensions [cm] | 22,5cm x 11cm x 8,5cm |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before starting assembly, familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

# ASKER DIPSWITCH CCT-POWER DS1527

Asker DipSwitch
CCT-Power
1527XX0009
14.10.2026 v.09.18
www.norlys.no

## Technical data

| | |
|---|---|
| LED module | Cree DK251013 J2835B CTW 2700K-3000K-4000K (Datasheet) |
| Driver | Yes |
| Driver durability | 50000h |
| External control | Dip Switch CCT-Power 2.7K-3K-4K (User manual) |
| Light source wattage | 2,9W / 3,9W / 5W / 6W |
| Luminaire wattage | 4,7W / 6W / 7,1W / max8,5W |
| Stanby power (Psb) | 0W |
| Lamp luminous flux | 3000K: 511 / 667 / 817 / 962lm |
| Luminaire luminous flux | 3000K: 244 / 334 / 400 / 474lm |
| Luminous intensity of the luminaire | 3000K: 102 / 140 / 167 / 197cd |
| ULOR | 0% |
| Color temperature | 2700-3000-4000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Flicker of light (Pst LM) | ≤1 |
| Strobe effect (SVM) | ≤0.4 |
| Colour rendering index CRI | 80 |
| L80TM-21 [wg LM-80] | >102 000h |
| L90 TM-21 [wg LM-80] | >52 600h |
| LED photobiological threat | RG0 or RG1 |
| Power Factor luminaire | PF: 0,65/0,72/0,78/0,82 |
| THD factor | < 15% |
| Overvoltage | 2kV |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+50°C |
| This product contains light source of energy efficiency class D / EPREL | |
| Inrush current | 5,8A / 40µs |
| BUG rating | B0-U3-G0 |

Maximum number of luminaires of this type per MCB:

B 10A: 103, B 16A: 166, C 10A: 166, C 16A: 265

## Spare parts

| | |
|---|---|
| 99zx0009 | Maintenance kit for lighting fixtures |
| ZS1527zx0009 | Service set. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | BIM Revit |
| BIM ArchiCAD | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| DS1527AL | ALUMINUM | 9006 |
| DS1527BL | BLACK | 9005 |
| DS1527CG | CEMENT GREY | 7033 |
| DS1527CB | COPPER BROWN | 8004 |
| DS1527CS | CORTEN STEEL | approx. 8011 |
| DS1527GR | GRAPHITE | 7016 |
| DS1527GB | GREY BEIGE | 7006 |
| DS1527WH | WHITE | 9003 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

Before starting assembly, familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.