


NORLYS ASKER DIPSWITCH CCT DS1528


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2 TD | DS

Asker DipSwitch CCT
1528XX0009
07.10.2026 v.09.7
www.norlys.no

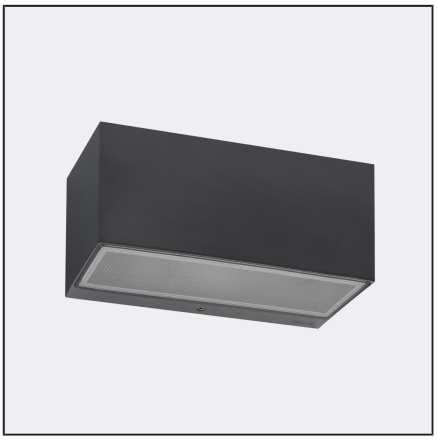

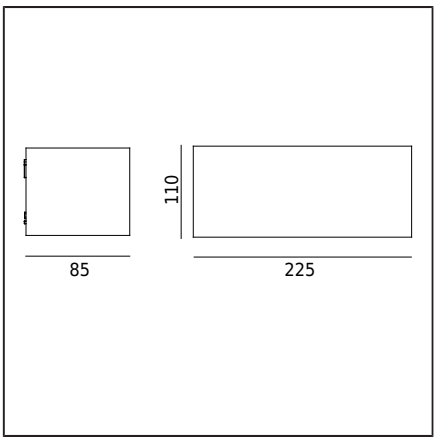

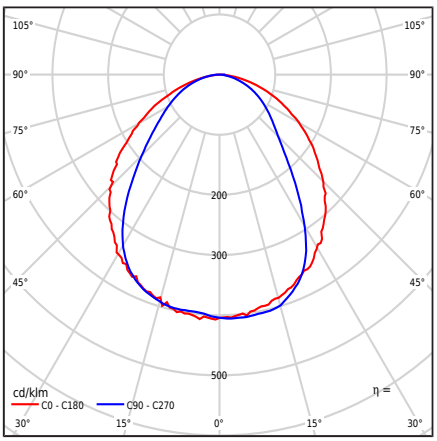

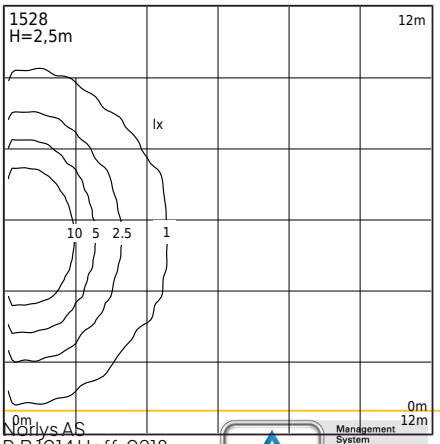

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light facing down.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting: wall surfaces, facades, and other architectural concepts. 1. LED color adjustment options in the range: - 2700K / 3000K / 4000K - factory setting 3000K - color adjustment via a switch on the power supply 2. Photometric examination of the luminous flux given for the value: - 3000K Other values provided in the customer instruction 3. Possible DALI2 /IEC62386 parts: 101; 102; 207 For more information - Commercial Department Norlys.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm pitch 180x60mm. According to the included installation instructions. Mounting spacers are included with the fixture.
Terminal	Connection terminals: max 5x2.5mm², possibility of looping the luminaire max 5x1.5mm². Cable with a round sheath diameter ø7...10.5mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire weight net / gross	1,72kg / 1,9kg
Box dimensions [cm]	25,5cm x 14cm x 10cm
Luminaire dimensions [cm]	22,5cm x 11cm x 8,5cm

Technical data

LED module	Cree DK251013 J2835B CTW 2700K-3000K-4000K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	DALI2-TD (User manual)
Light source wattage	6W
Luminaire wattage	8,1W
Stanby power (Psb)	< 0,45W
Lamp luminous flux	3000K: 962lm
Luminaire luminous flux	3000K: 484lm
Luminous intensity of the luminaire	3000K: 199cd
ULOR	0%
Color temperature	2700-3000-4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF: 0,86
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+50°C

This product contains light source of energy efficiency class D / EPREL

Inrush current	6.7A/2.4us
BUG rating	B0-U3-G0

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting assembly, familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

Maximum number of luminaires of this type per MCB:
B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

99zx0009	Maintenance kit for lighting fixtures
ZS1528zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
DS1528AL	ALUMINUM	9006
DS1528BL	BLACK	9005
DS1528GR	GRAPHITE	7016
DS1528WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting assembly, familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.