



NORLYS ASKER DIPSWITCH CCT-POWER MD1526

Asker DipSwitch
CCT-Power
1526XX0009
02.11.2026 v.09.10
www.norlys.no

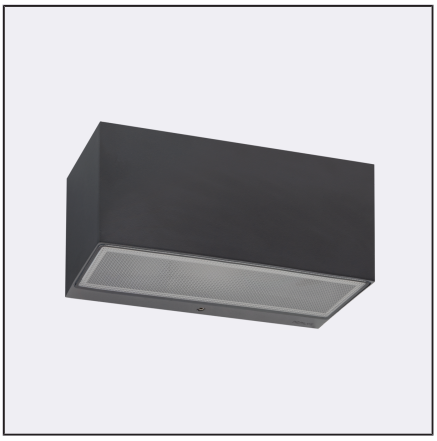

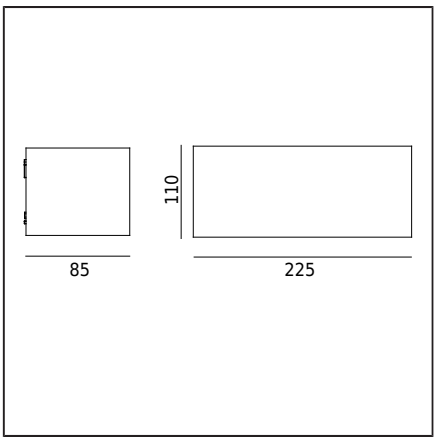

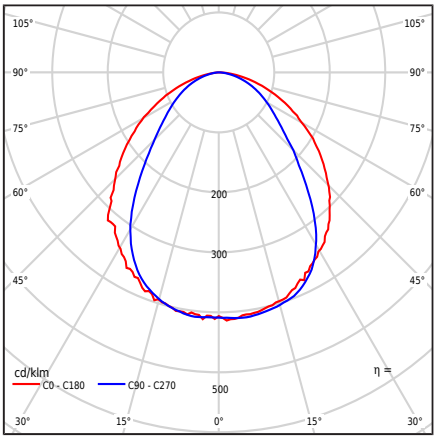

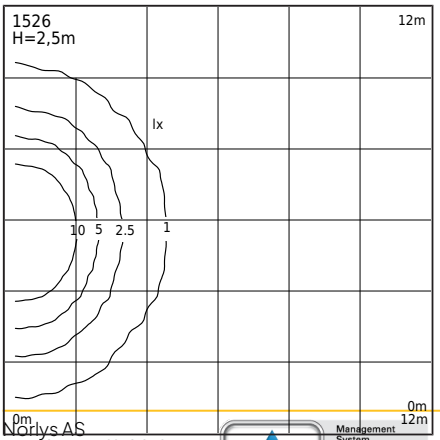

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light facing down.
Characteristics of the luminaire	Fixture with a wide range of applications, including lighting wall surfaces, facades, and other architectural concepts. 1. Fixture equipped with a microwave motion sensor with dusk switch and motion hold. 2. Factory settings of the sensor: - Detection area: 100% - Hold time: 5s - Sensor [lx]: off 3. Before installation, set sensor parameters according to your own assumptions, following the included customer instructions. 4. Adjustable fixture power in the range: - 5.4W / 6.7W / 7.9W / 9.3W - Factory settings 6.7W/334lm - Power adjustment via switch on the power supply 5. Adjustable LED color in the range: - 2700K / 3000K / 4000K - Factory settings 3000K - Color adjustment via switch on the power supply 6. Photometric testing of the luminous flux provided for values - 3000K - 9.3W

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spacing 180x60mm. According to the enclosed installation instructions. Mounting spacers are included with the fitting.
Terminal	Connection terminals: max 3x2.5mm², possibility to connect the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter ø7...10.5mm.
Type of light source	LED module, power supply, microwave motion sensor. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	1,73kg / 1,91kg
Box dimensions [cm]	25,5cm x 14cm x 10cm
Luminaire dimensions [cm]	22,5cm x 11cm x 8,5cm

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

Before starting the assembly, please refer to the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the deterioration of the fixture's quality.

ASKER DIPSWITCH CCT-POWER MD1526

Asker DipSwitch
CCT-Power
1526XX0009
02.11.2026 v.09.10
www.norlys.no

Technical data

LED module	Cree DK251013 J2835B CTW 2700K-3000K-4000K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Microwave motion sensor MC119S (User manual)
Light source wattage	2,9W / 3,9W / 5W / 6W
Luminaire wattage	5,4W / 6,7W / 7,9W / max9,3W
Stanby power (Psb)	0,1W
Lamp luminous flux	3000K: 511 / 667 / 817 / 962lm
Luminaire luminous flux	3000K: 244 / 334 / 400 / 474lm
Luminous intensity of the luminaire	3000K: 102 / 140 / 167 / 197cd
Efficiency of the luminaire	82,9lm/W
ULOR	0%
Color temperature	2700-3000-4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF: 0,65/0,71/0,76/0,80
THD factor	< 15%
Overvoltage	2kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	5,8A / 40µs
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 103, B 16A: 166, C 10A: 166, C 16A: 265

Spare parts

99zx0009	Maintenance kit for lighting fixtures
ZS1526zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
MD1526AL	ALUMINUM	9006
MD1526BL	BLACK	9005
MD1526GR	GRAPHITE	7016
MD1526WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

Before starting the assembly, please refer to the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the deterioration of the fixture's quality.