



# NORLYS ASKER MD1529

Asker 1529XX0009
02.11.2026 v.09.17
www.norlys.no

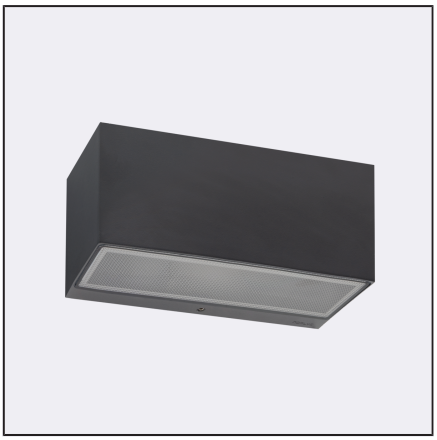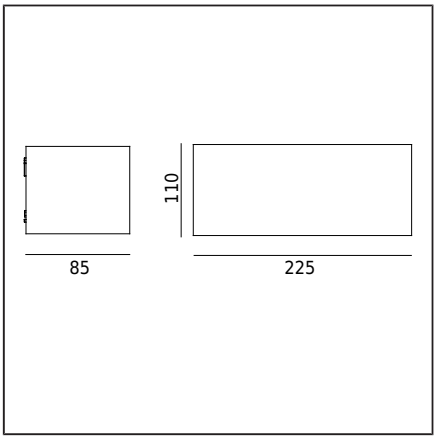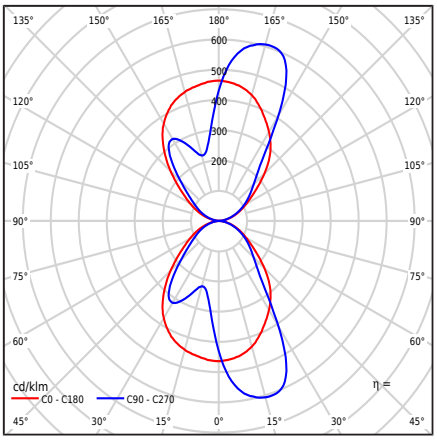

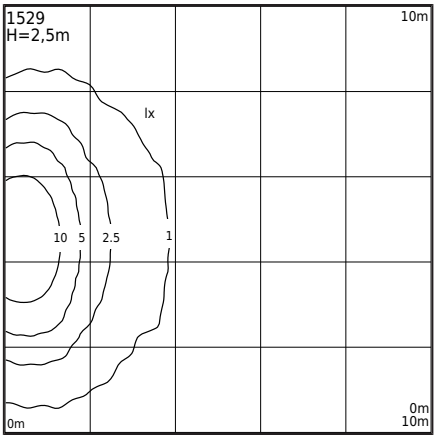


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Double-sided light: directed up and down. |
| Characteristics of the luminaire | Luminaire with a wide range of applications, including lighting of wall surfaces, facades, and other architectural concepts.<br>1. Luminaire equipped with a microwave motion sensor with a dusk switch and motion hold feature.<br>2. Factory settings of the sensor:<br>- Detection area: 100%<br>- Hold time: 5s<br>- sensor [lx]: off<br>3. After installation, the sensor parameters should be set according to individual assumptions. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland. |
| Mounting method | Fixture mounting: 2 holes ø4.5mm spaced 180x60mm.<br>According to the included installation instructions.<br>Other accessories are to be purchased separately. |
| Terminal | Terminal block connections: max 3x2.5mm²,<br>option to loop connect the luminaire max 3x1.5mm².<br>Cable in a round sheath with a diameter of ø7...10.5mm. |
| Type of light source | Integrated AC LED module, microwave motion sensor<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support |
| Luminaire weight net / gross | 1,44kg / 1,58kg |
| Box dimensions [cm] | 26cm x 12,5cm x 10,5cm |
| Luminaire dimensions [cm] | 22,5cm x 11cm x 8,5cm |

## Technical data

| | |
|---|---|
| LED module | Lumens EDC 57C 8W xxx 230V F201 2,7K (Datasheet) |
| External control | Microwave motion sensor MC119S (User manual) |
| Light source wattage | 8,8W |
| Luminaire wattage | 9,4W |
| Stanby power (Psb) | 0,1W |
| Lamp luminous flux | 773lm |
| Luminaire luminous flux | 241lm |
| Luminous intensity of the luminaire | 75cd |
| Efficiency of the luminaire | 25,6lm/W |
| ULOR | 50% |
| Color temperature | 2700K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L70TM-21 [wg LM-80] | >55 000h |
| LED photobiological threat | RG0 or RG1 |
| Power Factor luminaire | PF 0,95 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |
| This product contains light source of energy efficiency class F / EPREL | |
| Inrush current | 35mA / 60ms |
| BUG rating | B0-U3-G0 |

Maximum number of luminaires of this type per MCB:

B 10A: 158, B 16A: 250, C 10A: 260, C 16A: 425

## Spare parts

| | |
|---|---|
| 99zx0009 | Maintenance kit for lighting fixtures |
| ZS1529zx0009 | Repair kit. |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

# ASKER MD1529




Asker 1529XX0009
02.11.2026 v.09.17
www.norlys.no

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | BIM Revit |
| BIM ArchiCAD | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| MD1529AL | ALUMINUM | 9006 |
| MD1529BL | BLACK | 9005 |
| MD1529CG | CEMENT GREY | 7033 |
| MD1529CB | COPPER BROWN | 8004 |
| MD1529CS | CORTEN STEEL | approx. 8011 |
| MD1529GR | GRAPHITE | 7016 |
| MD1529GB | GREY BEIGE | 7006 |
| MD1529WH | WHITE | 9003 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.