



NORLYS ASKER MD1530

Asker 1530XX0009
02.11.2026 v.09.13
www.norlys.no

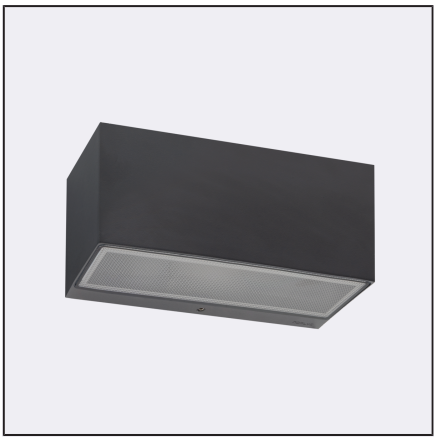

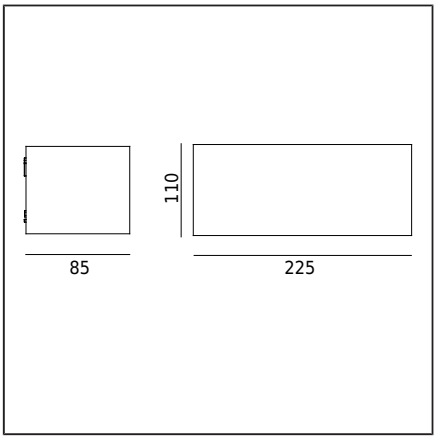

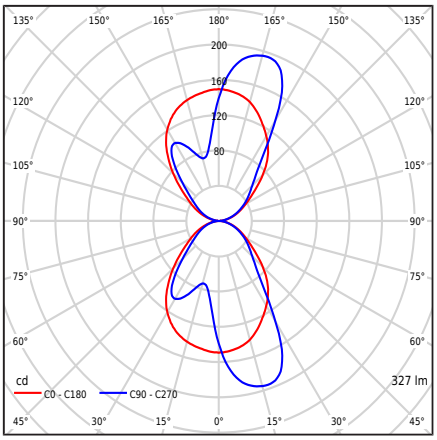

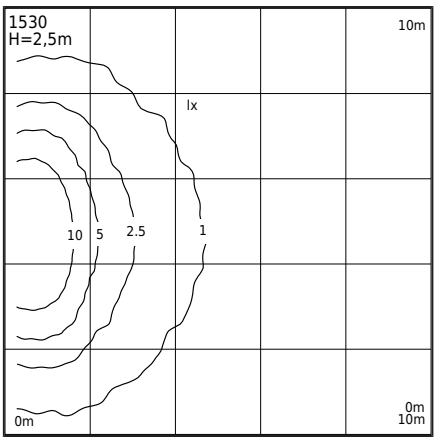

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting for wall surfaces, facades, and other architectural concepts. 1. The fixture is equipped with a microwave motion sensor with a twilight switch and motion hold. 2. Factory sensor settings: - Detection area: 100% - Maintaining time: 5s - Sensor [lx]: off 3. After installation, set the sensor parameters according to your own assumptions

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spaced 180x60mm. According to the attached installation instructions. Other accessories must be purchased separately.
Terminal	Terminal blocks: max 3x2.5mm², option for looping the fixture max 3x1.5mm². Round cable diameter ø7...10.5mm.
Type of light source	Integrated AC LED module, microwave motion sensor Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	1,44kg / 1,58kg
Box dimensions [cm]	26cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	22,5cm x 11cm x 8,5cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 4K (Datasheet)
External control	Microwave motion sensor MC119S (User manual)
Light source wattage	8,8W
Luminaire wattage	9,4W
Stanby power (Psb)	0,1W
Lamp luminous flux	874lm
Luminaire luminous flux	328lm
Luminous intensity of the luminaire	101cd
Efficiency of the luminaire	34,9lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	35mA / 60ms
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 158, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

99zx0009	Maintenance kit for lighting fixtures
ZS1530zx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

NORLYS ASKER MD1530

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
MD1530AL	ALUMINUM	9006
MD1530BL	BLACK	9005
MD1530CG	CEMENT GREY	7033
MD1530CB	COPPER BROWN	8004
MD1530CS	CORTEN STEEL	approx. 8011
MD1530GR	GRAPHITE	7016
MD1530GB	GREY BEIGE	7006
MD1530GA	HOT-DIP GALVANIZING	-
MD1530WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.