


NORLYS ASKER SMALL DOWN MD1531


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | No Dim

Asker small Down
1531XX0009
02.11.2026 v.09.9
www.norlys.no

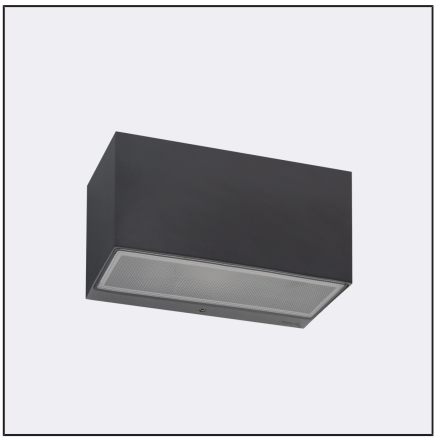

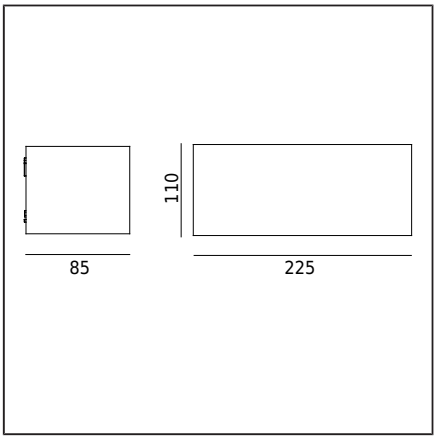

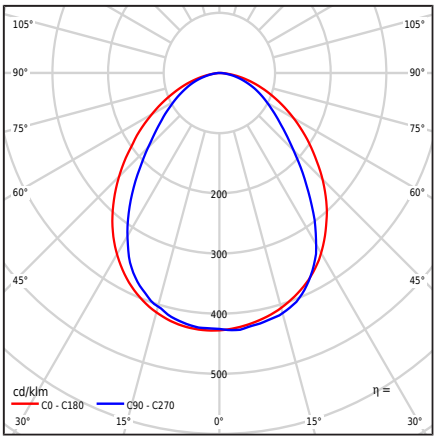

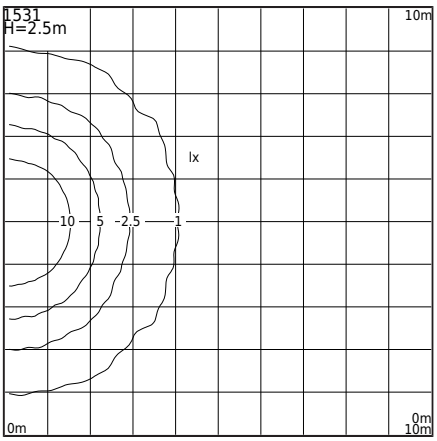

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting of wall surfaces, facades, and other architectural concepts. 1. The fixture is equipped with a microwave motion sensor with a dusk switch and motion sustain. 2. Factory settings of the sensor: - Detection area: 100% - Hold time: 5s - sensor [lx]: off 3. After installation, sensor parameters should be set according to personal requirements.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spaced 180x60mm. According to the included installation manual. Other accessories must be purchased separately.
Terminal	Terminal blocks: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	Integrated AC LED module, microwave motion sensor Replaceable (LED only) light source by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	1,44kg / 1,58kg
Box dimensions [cm]	26cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	22,5cm x 11,5cm x 8,5cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 2,7K (Datasheet)
External control	Microwave motion sensor MC119S (User manual)
Light source wattage	8,8W
Luminaire wattage	9,4W
Lamp luminous flux	773lm
Luminaire luminous flux	331lm
Luminous intensity of the luminaire	145cd
Efficiency of the luminaire	35,2lm/W
ULOR	0%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>55 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,97
Ta Rated temperature	+25°C
Ambient operating temp. range	-25...+60°C
This product contains light source of energy efficiency class F / EPREL	
Inrush current	40mA / 60ms
BUG rating	B0-U0-G0

Maximum number of luminaires of this type per MCB:

B 10A: 158, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

99zx0009	Maintenance kit for lighting fixtures
ZS11531zx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, you should read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of fixture quality.

ASKER SMALL DOWN MD1531

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
MD1531AL	ALUMINUM	9006
MD1531BL	BLACK	9005
MD1531CG	CEMENT GREY	7033
MD1531CB	COPPER BROWN	8004
MD1531CS	CORTEN STEEL	approx. 8011
MD1531GR	GRAPHITE	7016
MD1531GB	GREY BEIGE	7006
MD1531WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, you should read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of fixture quality.