
NORLYS BASEL MD671

Basel 671XX0009
16.09.2026 v.09.10
www.norlys.no



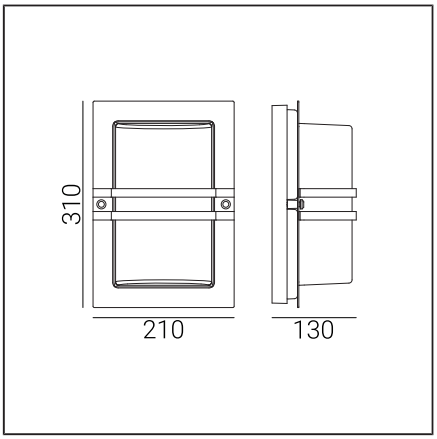

Type of luminaire

Type of luminaire	Wall light,
Characteristics of the luminaire	Ceiling lamp fixture with contemporary design. 1. The fixture is equipped with a microwave motion sensor with a dusk switch and motion hold. 2. Factory settings of the sensor: - Detection area: 100% - Hold time: 5s - Sensor [lx]: off 3. After installation, set the sensor parameters according to your own assumptions, in accordance with the enclosed customer manual.

General information

Materials	Base - powder painted aluminum cast. Front - stainless steel , hot dip galvanized steel, powder coated steel. Lens - safety glass, satin. Silicone gasket.
Mounting method	Fixture mounting: 2 ø4.5mm holes, spacing 138x50mm. According to the included installation instructions.
Terminal	Connection terminals: max 3x2.5mm², possibility of loop connection for luminaire max 3x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	Integrated AC LED module, microwave motion sensor Replaceable (LED only) light source by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	2,9kg / 3,8kg
Box dimensions [cm]	27,5cm x 23cm x 33,5cm
Luminaire dimensions [cm]	21cm x 13cm x 31cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 3K (Datasheet)
External control	Mikrofalowy czujnik ruchu MC030S L (User manual)
Light source wattage	9,5W
Luminaire wattage	9,5W
Lamp luminous flux	1080lm
ULOR	9%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	2,98A / 34,07µs

Spare parts

ZS671zx0009	Service set.

Files to download

Manual

Indexes

Index	Color	RAL
MD671BL	BLACK	9005
MD671GA	HOT-DIP GALVANIZING	-
MD671ST	STAINLESS STEEL	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, familiarize yourself with the instructions attached to the fixture. Assembly and service works should be carried out by a person with the appropriate authorizations and qualifications, in compliance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the degradation of the fixture quality.