
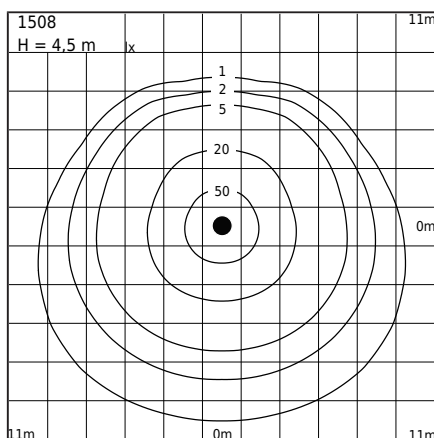
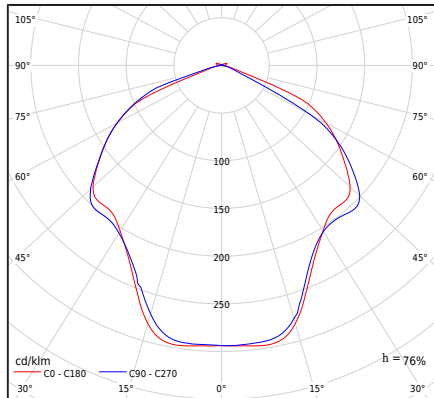


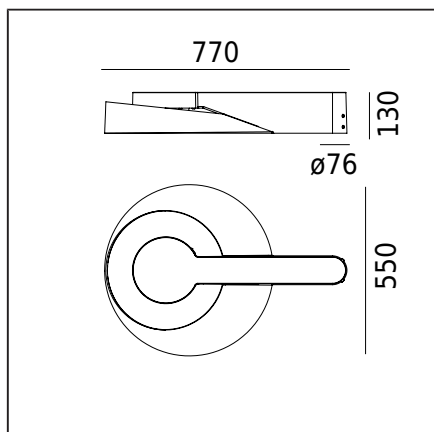

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	An asymmetric distributed and down facing light.
Characteristics of the luminaire	Modern design luminaire, mounted on a telescopic lighting pole with diameter Ø76mm. Tightness of the lighting chamber - IP65.

General information

Materials	Powder painted aluminum cast. Lens - satin polycarbonate, UV stabilized. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to Ø76mm lightning pole.
Terminal	4.5 m H05VV-F 3G1 cable, for connection inside the lighting pole (in an appropriately selected electrical installation box).
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Net / gross weight of luminaire	10,6kg / 10,6kg
Box dimensions [cm]	56cm x 21cm x 73,5cm
Side area of luminaire	0,1m ²

Technical data

Luminaire wattage	31,5W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>60 000h
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **A**

Inrush current	18A/250µs
----------------	-----------

Spare parts

06150504	Lampshade.
08150500	Gasket.
46999682	LED module.
46999729	Power supply.

Files to download

Photometric LDT files	Manual
-----------------------	--------

Indexes

Index	Color	RAL
1508AL	ALUMINUM	9006
1508GR	GRAPHITE	7016