

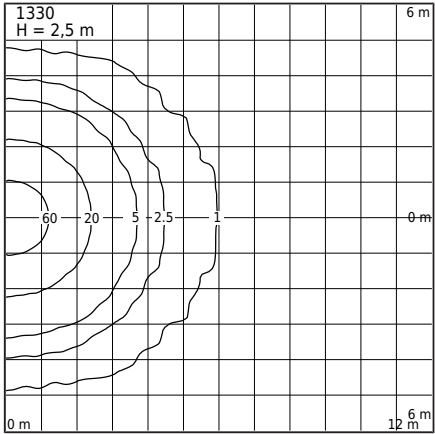


 NORLYS

HITRA 1330

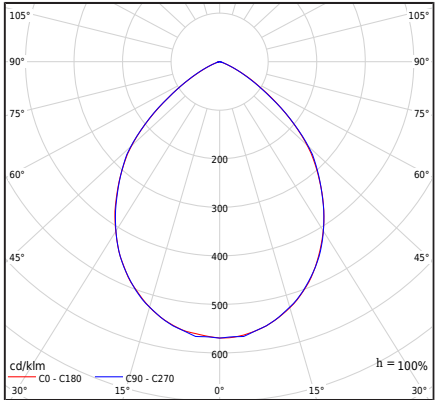

Hitra 1330XX0009
17.03.2025 v.09.6
www.norlys.no

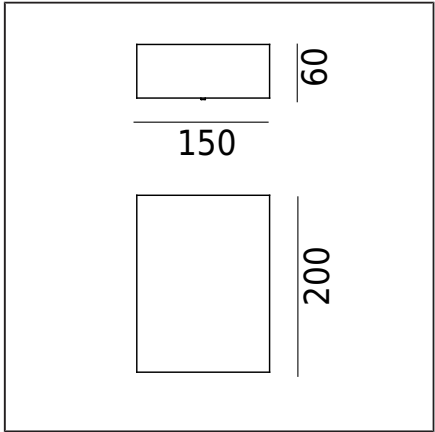

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A luminaire with contemporary design. For lighting private areas and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 holes $\varnothing 4$ mm, spacing 104mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter $\varnothing 7...10,5$ mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Net / gross weight of luminaire	1,41kg / 1,58kg
Box dimensions [cm]	23cm x 16cm x 8cm
Luminaire dimensions [cm]	20cm x 15cm x 6cm

Technical data

Luminaire wattage	9,5W
Luminaire luminous flux	920lm
Efficiency of the luminaire	96,8lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class  /  EPREL

Inrush current	2,98A / 34,07 μ s
BUG rating	B1-U1-G0

Spare parts

ZS1330zx0009	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
1330AL	ALUMINUM	9006
1330GR	GRAPHITE	7016
1330WH	WHITE	9003