
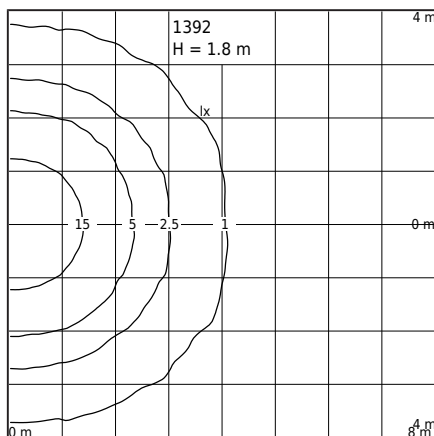
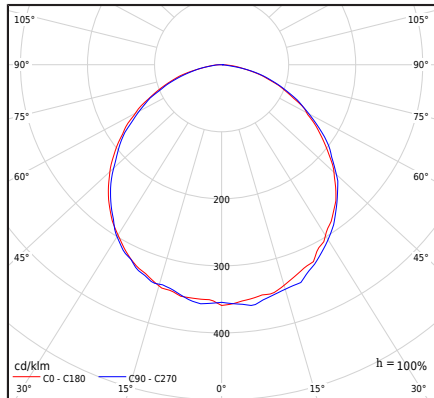


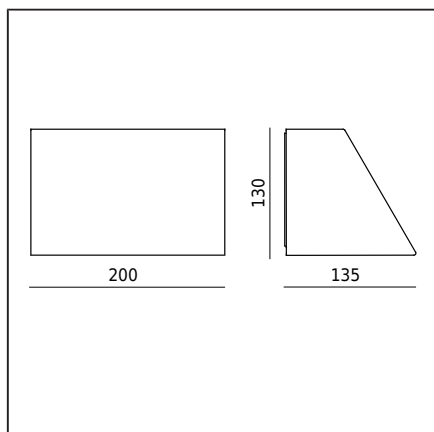

## Type of luminaire

|                                  |                                                                                                                                            |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Type of luminaire                | Wall light,                                                                                                                                |
| Photometric body                 | Diffuse downward-directed hemispherical light                                                                                              |
| Characteristics of the luminaire | Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts. |

## General information

|                      |                                                                                                                                                                                                                            |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Materials            | Base - galvanized steel. Front - galvanized steel or powder coated galvanized steel. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.                                                      |
| Mounting method      | Fixing of the luminaire: 2 holes $\varnothing 4,2$ mm, spacing 122mm.                                                                                                                                                      |
| Terminal             | Fixing of the luminaire: max. $3 \times 2,5$ mm <sup>2</sup> , possibility to connect luminaire in loop max. $3 \times 1,5$ mm <sup>2</sup> . A round wire in the isolation with a diameter $\varnothing 7 \dots 10,5$ mm. |
| Type of light source | LED module, electronic power supply                                                                                                                                                                                        |
| Light control        | Trailing edge (TE) dimming                                                                                                                                                                                                 |

## Technical data

|                                     |                 |
|-------------------------------------|-----------------|
| Luminaire wattage                   | 5,2W            |
| Luminaire luminous flux             | 346lm           |
| Efficiency of the luminaire         | 66,5lm/W        |
| Color temperature                   | 3000K           |
| Colour consistency (McAdam ellipse) | SDCM3           |
| Colour rendering index CRI          | 80              |
| Rated life time L70/B50 at 25°C     | >70 000h        |
| Power Factor luminaire              | PF 0,96         |
| Ta Rated temperature                | +25°C           |
| Ambient temperature                 | Ta max=+65°C    |
| Inrush current                      | 1A/15,2 $\mu$ s |
| BUG rating                          | B0-U1-G0        |

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 250, C 10A: 260, C 16A: 425

## Spare parts

|          |               |
|----------|---------------|
| 08139000 | Gasket.       |
| 46999609 | LED module.   |
| 46999746 | Power supply. |

## Files to download

|                       |                       |
|-----------------------|-----------------------|
| Photometric LDT files | Photometric IES files |
| Manual                |                       |

## Indexes

| Index  | Color               | RAL  |
|--------|---------------------|------|
| 1392BL | BLACK               | 9005 |
| 1392GA | HOT-DIP GALVANIZING | -    |