
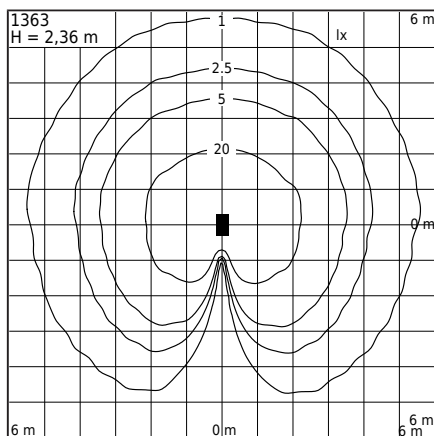
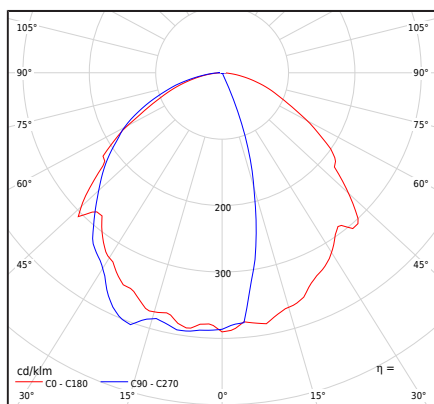


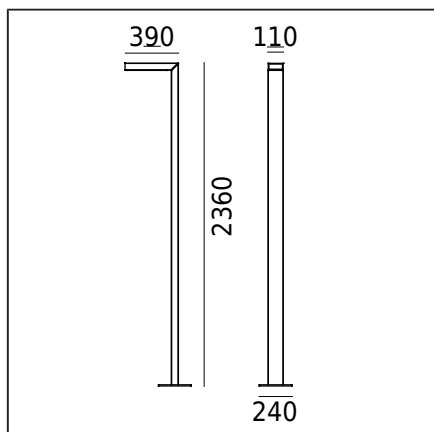

Type of luminaire

Type of luminaire	Corner
Photometric body	Single-sided, symmetric light facing down.
Characteristics of the luminaire	Pole luminaire with 2360mm high (one-part luminaire). For lighting private areas, public spaces and other architectural concepts.

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Fixing of the luminaire: 4 holes on a diameter $\varnothing 12\text{mm}$, spacing 200x200mm. Other accessories need to be purchased separately.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x2,5mm ² . A round wire in the isolation with a diameter of max $\varnothing 12,5\text{mm}$.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	11kg / 17,05kg
Box dimensions [cm]	26cm x 240cm x 53cm
Side area of luminaire	0,258m ²

Technical data

2 LED modules	Yes
Luminaire wattage	18W
Luminaire luminous flux	962lm
Efficiency of the luminaire	53,4lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70B50 [wg LM-80]	50 000h
Power Factor luminaire	PF>0,98
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max=+65°C
Inrush current	108,8mA/500µs
BUG rating	B1-U1-G0

Accessories sold separately

117GA0009	Ground anchor
116ZX0009	Concreting anchor

Spare parts

06136000	Lampshade
08136000	Gasket.
46999388	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1363AL	ALUMINUM	9006
1363BL	BLACK	9005
1363BL	BLACK	9005
1363GR	GRAPHITE	7016