
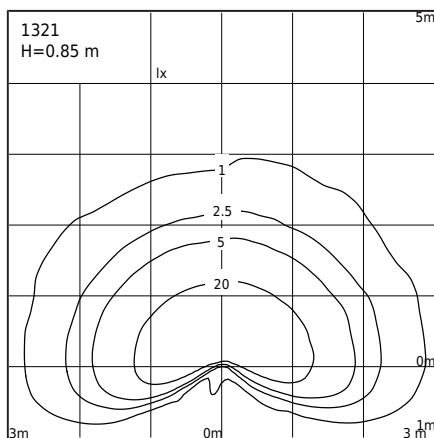
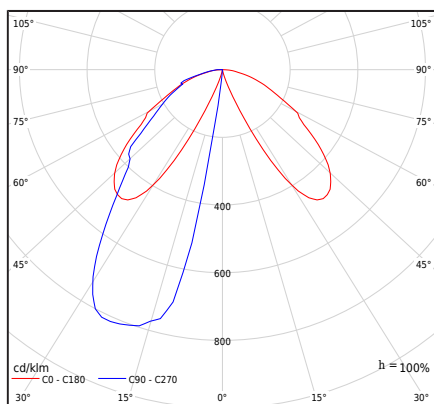


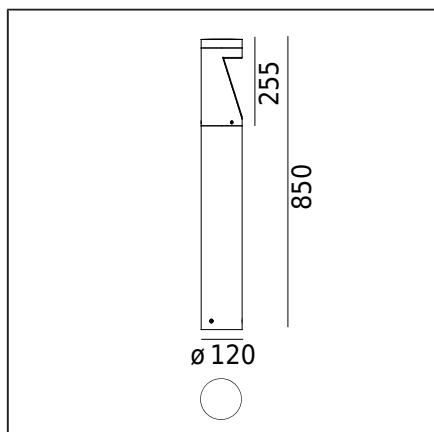

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Bollard luminaire of stable and durable construction. For lighting private areas and public spaces. IP of lighting chamber - 65.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting the luminaire: 3 holes $\varnothing 9\text{mm}$ in diameter $\varnothing 65\text{mm}$ every 120° .
Terminal	Connection terminals: max $3 \times 2,5\text{mm}^2$, possibility to connect luminaire in loop max $3 \times 1,5\text{mm}^2$. A round wire in the isolation with a diameter of max $\varnothing 12,5\text{mm}$.
Type of light source	LED module, electronic power supply
Light control	Non-dimmable fixture
Net / gross weight of luminaire	6kg / 7kg
Box dimensions [cm]	16cm x 16cm x 93cm

Technical data

Luminaire wattage	10,7W
Luminaire luminous flux	283lm
Efficiency of the luminaire	26,4lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>50 000h
Power Factor luminaire	PF>0,90
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C
Inrush current	18,6A/240μs

Maximum number of luminaires of this type per MCB:

B 10A: 21, B 16A: 34, C 10A: 35, C 16A: 57

Accessories sold separately

206GA0010	Ground anchor
205ZX0010	Concreting anchor
3080GA0009	Mounting adapter
3086GA0009	Mounting adapter

Spare parts

46999680	LED module.
46999727	Power supply.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit

Indexes

Index	Color	RAL
1321AL	ALUMINUM	9006
1321GR	GRAPHITE	7016