
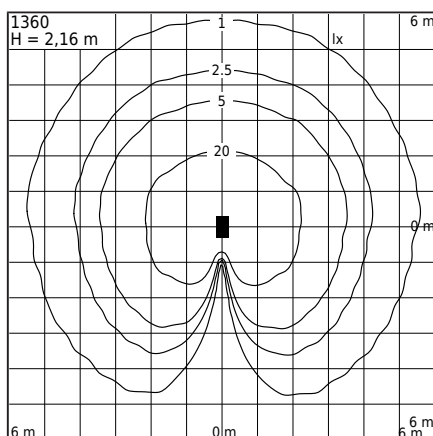
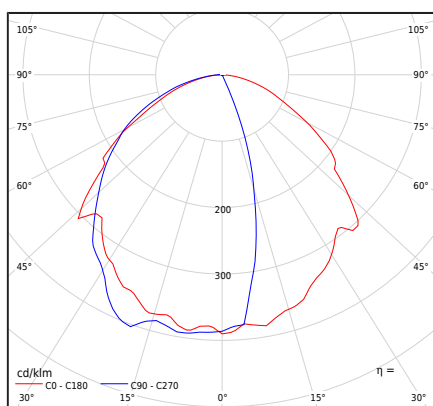
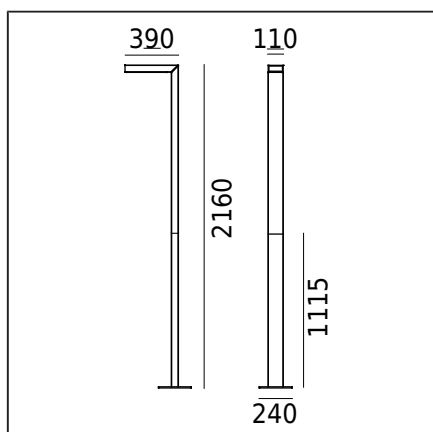


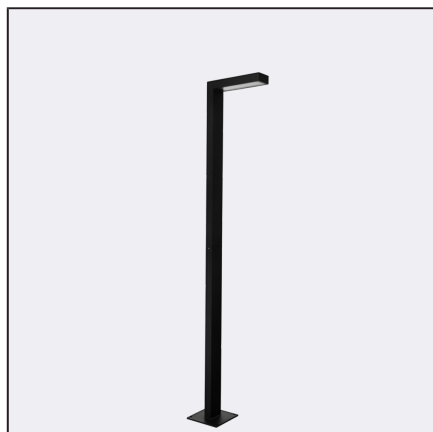

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Single-sided, symmetric light facing down.
Characteristics of the luminaire	Pole luminaire with 2160mm high (two-part luminaire). For lighting private areas, public spaces and other architectural concepts.

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Fixing of the luminaire: 4 holes on a diameter $\varnothing 12\text{mm}$, spacing 200x200mm. Art. 1360: 2-parts pole luminaire. Other accessories need to be purchased separately.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x2,5mm ² . A round wire in the isolation with a diameter of max $\varnothing 12,5\text{mm}$.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	10,54kg / 12,11kg
Box dimensions [cm]	25cm x 115cm x 56cm
Side area of luminaire	0,232m ²

Technical data

External control	Phase dimmer Lumens LED AC (User manual)
Luminaire wattage	18W
Luminaire luminous flux	962lm
Efficiency of the luminaire	53,4lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF > 0,99
THD factor	< 20%
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max = +65°C
Inrush current	108,8mA/500µs
BUG rating	B1-U1-G0

Accessories sold separately

116ZX0009	Concreting anchor
117GA0009	Ground anchor

Spare parts

06136000	Lampshade.
08136000	Gasket.
ZS1360zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1360AL	ALUMINUM	9006
1360BL	BLACK	9005
1360BL	BLACK	9005
1360GR	GRAPHITE	7016