
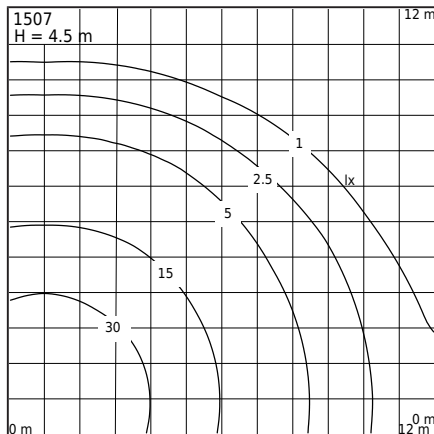
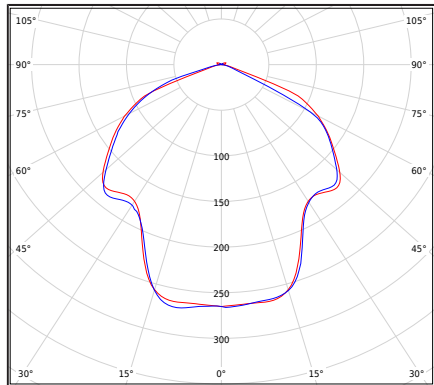


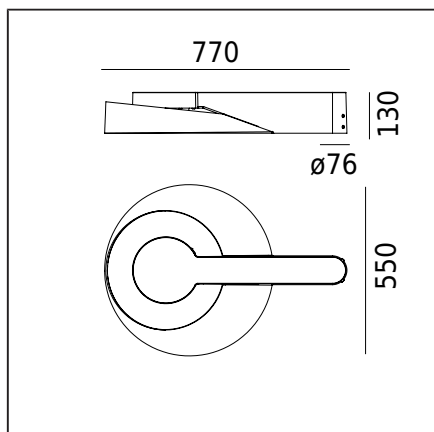

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	An asymmetric distributed and down facing light.
Characteristics of the luminaire	Modern design luminaire, mounted on a telescopic lighting pole with diameter Ø76mm. Tightness of the lighting chamber - IP65.

General information

Materials	Powder painted aluminum cast. Lens - satin polycarbonate, UV stabilized. Silicone gasket.
Mounting method	Fixing of the luminaire: luminaire adjusted to Ø76mm lightning pole.
Terminal	4.5 m H05VV-F 3G1 cable, for connection inside the lighting pole (in an appropriately selected electrical installation box).
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Net weight of luminaire	8,77kg
Box dimensions [cm]	56cm x 21cm x 73,5cm
Side area of luminaire	0,1m ²

Technical data

Luminaire wattage	46,7W
Luminaire luminous flux	4061lm
Efficiency of the luminaire	87lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>100 000h
Rated life time L80/B20 at 25°C	>46 000h
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **D**

Inrush current	22A/260µs
----------------	-----------

Spare parts

06150504	Lampshade.
08150500	Gasket.
46999677	LED module.
46999728	Power supply.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1507AL	ALUMINUM	9006
1507GR	GRAPHITE	7016