NORLYS KARLSTAD 2033

AC 220-240V 50-60Hz | IP 55 | E27

Karlstad 2033XX0309
17.03.2025 v.09.15
www.norlys.no

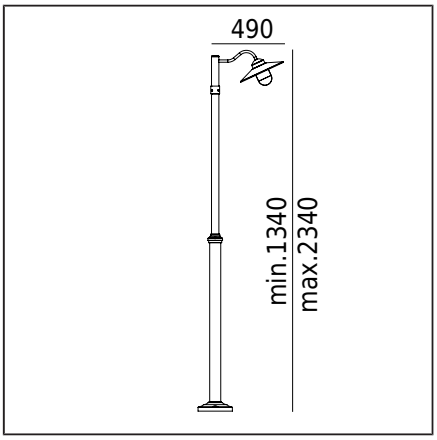

Type of luminaire

Type of lumianire	Pole luminaire.
Photometric body	Uncovered light, partly covered from the top.
Characteristics of the luminaire	Luminaire with Scandinavian design mounted on a pole with adjustable height 1650... 2540mm For lighting gardens, parks, and other architectural concepts

General information

Materials	Hot-dip galvanized steel. Powder painted steel. Lens - clear polycarbonate, UV stabilized. EPDM cable gland.
Mounting method	Mounting of the luminaire: 3 holes ø10,5mm on the diameter of ø207mm every 120° The composition of the set: art. 2031- head art. 3011- pole (for BL and WH versions) art. 3009- pole (for GA version) Other accessories must be ordered separately
Terminal	Connection terminals: max 2x2,5mm² Possibility of connecting the luminaire in loops max 2x2,5mm² Round insulated cable with a diameter of ø6...12,5mm
Type of light source	E27 Lamp Replaceable light source by an end-user.

Technical data

Luminaire wattage	LED max 9W
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

Recommended light sources

Osram LED Parathom Classic E27	Philips Master LEDbulb / Ledbulb Classic E27

Spare parts

06240003	Lampshade.

Files to download

Manual

Indexes

Index	Color	RAL
2033BL	BLACK	9005
2033GA	HOT-DIP GALVANIZING	-

Norlys AS
P.B 1014 Hoff, 0218 Oslo
Hovfaret 4B, 0275 Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Information on recommended light sources based on manufacturers' data. We are not responsible for the completeness and the validity of the offer, therefore we refer to the current technical information of the manufacturers of light sources. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire