

NORLYS HALMSTAD 296


AC 220-240V 50-60Hz | IP 65 | IK 10 | E27

Halmstad 296XX0011
16.09.2026 v.11.14
www.norlys.no



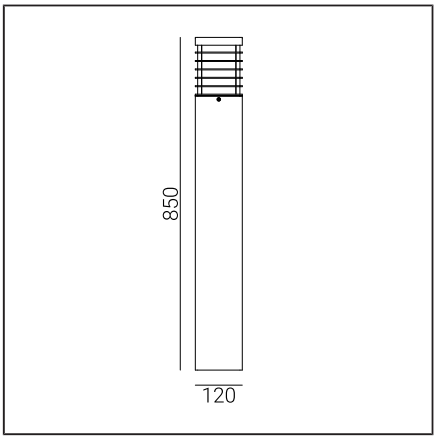

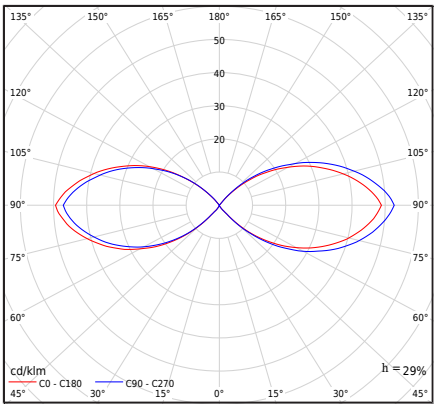

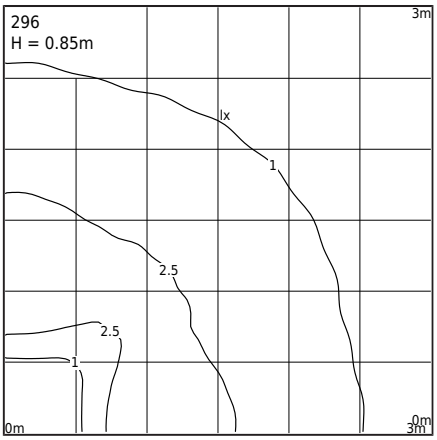

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Uncovered light, partly covered from the top.
Characteristics of the luminaire	A bollard fixture with a stable and durable construction. Suitable for lighting private areas and public zones. - Technical support: information from the Sales Department of Norlys.

General information

Materials	Hot-dip galvanized steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø9mm on a diameter of ø65mm every 120° According to the attached assembly instructions Other accessories must be purchased separately Full control of the luminaire with the WiZ lamp, using Bluetooth and WiFi signals - Check the range of the WiFi network at the place of installation of the luminaire
Terminal	Connection terminals: max 3x4mm² Possibility to connect luminaire in loop max 3x2,5mm² Round insulated cable with a diameter of max ø12,5mm
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	12,76kg / 13,67kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	12cm x 12cm x 85cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	48%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
BUG rating	B0-U3-G1

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06295000	Lampshade - service kit
08295000	Gasket.

Files to download

Photometric LDT files	Photometric IES files
Manual	Certificates
BIM ArchiCAD	

Indexes

Index	Color	RAL
296BL	BLACK	9005
296GR	GRAPHITE	7016
296GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Information of recommended light sources based on manufacturers' data. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. We are not responsible for the completeness and validity of the offer, therefore we refer to the applicable technical information of the manufacturers of light sources. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire