

# NORLYS LONDON 4136


AC 220-240V 50-60Hz | IP 54 | IK 07 | LED

London 4136XX0009
16.09.2026 v.09.9
www.norlys.no

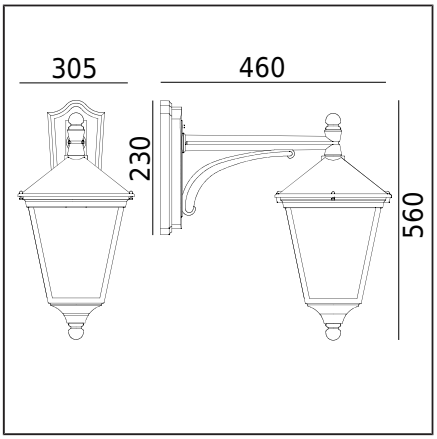

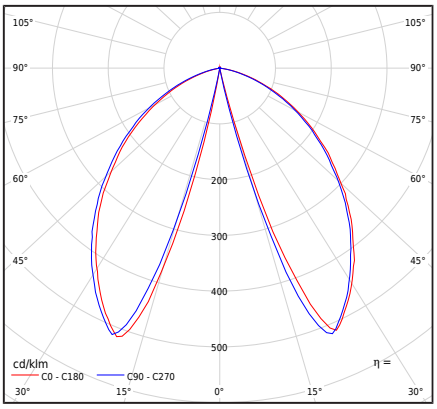


## Type of luminaire
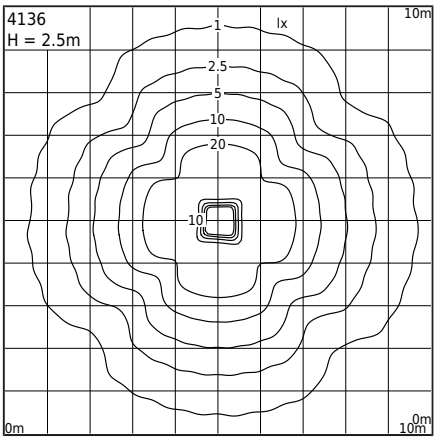
| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Light discovered |
| Characteristics of the luminaire | A wall lamp luminaire with a classic design for general use.<br>Can be mounted on the corners of architectural structures. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized.<br>EPDM cable gland. |
| Mounting method | Mounting of the luminaire: 4 holes ø5mm, spacing 25x140mm |
| Terminal | CABLE H03VV-F 2x0.5 connection terminals, connection terminals, max 2x2.5mm²<br>Round insulated cable in with a diameter of ø7...10.5 mm |
| Type of light source | LED module AC integrated<br>Replaceable (LED only) light source by a professional. |
| Luminaire weight net / gross | 3,57kg / 4,94kg |
| Box dimensions [cm] | 44cm x 32,5cm x 54cm |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo DLM ES 1100/8xx G2 3K (Datasheet) |
| Light source wattage | 9,5W |
| Luminaire wattage | 9,5W |
| Lamp luminous flux | 1100lm |
| Luminaire luminous flux | 757lm |
| Color temperature | 3000K |
| Colour rendering index CRI | 80 |
| L70TM-21 [wg LM-80] | >50 000h |
| Power Factor luminaire | PF>0,9 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |
| This product contains light source of energy efficiency class E / EPREL | |
| Inrush current | 3,01A/32,66µs |
| BUG rating | B1-U1-G0 |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 4136BL | BLACK | 9005 |
| 4136WH | WHITE | 9003 |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.


Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.