


NORLYS LONDON 4138

London 4138XX0010
16.09.2026 v.10.5
www.norlys.no



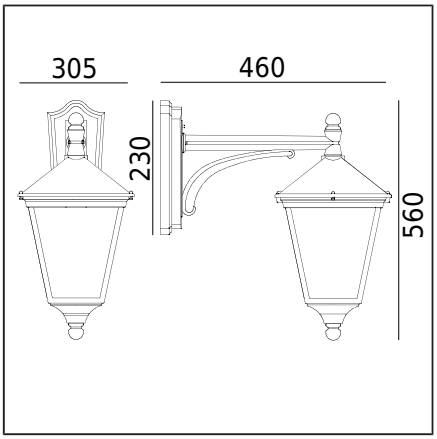

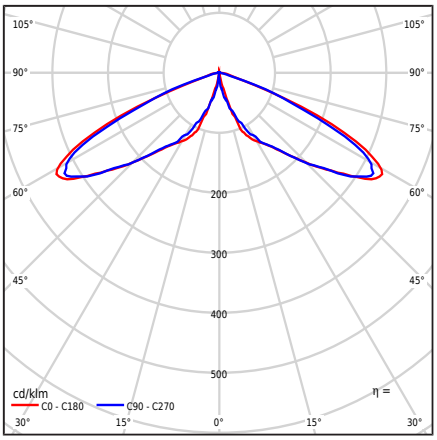

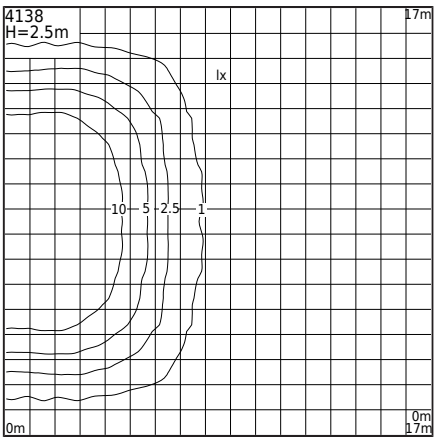

Type of luminaire

Type of luminaire	Wall, arm-mounted luminaire.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	A classic design wall sconce for general use. Can be mounted on the corners of architectural objects.

General information

Materials	Powder painted aluminum cast.
Mounting method	Fixture mounting: 4 holes ø5mm, spacing 25x140mm.
Terminal	Cable H03VV-F 2x0.5, connection terminals, max 2x2.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Luminaire weight net / gross	3,6kg / 5kg
Box dimensions [cm]	44cm x 32,5cm x 54cm
Luminaire dimensions [cm]	30,5cm x 460cm x 560cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G4+ 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	13,5W
Luminaire wattage	14,6W
Lamp luminous flux	2000lm
Luminaire luminous flux	1795lm
Efficiency of the luminaire	122,9lm/W
ULOR	0,42%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF>0,9
THD factor	<15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	5A / 50µs
BUG rating	B1-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 31, B 16A: 50, C 10A: 52, C 16A: 85

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
4138BL	BLACK	9005
4138WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE