
NORLYS BASEL 672

Basel 672XX0009
14.10.2026 v.09.6
www.norlys.no



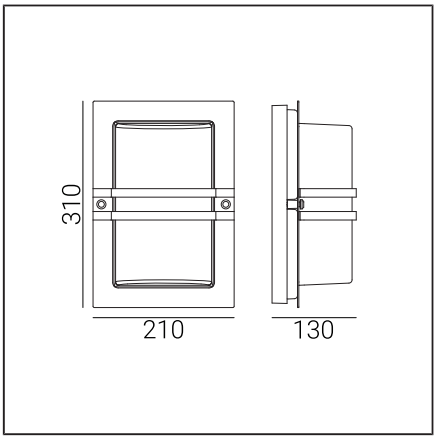

Type of luminaire

Type of luminaire	Wall light,
Characteristics of the luminaire	A ceiling-type luminaire with a contemporary design

General information

Materials	Base - powder painted aluminum cast. Front - stainless steel , hot dip galvanized steel, powder coated steel. Lens - safety glass, satin. Silicone gasket.
Mounting method	Mounting of the luminaire: 2 holes ø4.5mm, spacing 138x50mm According to the attached assembly instructions
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a diameter of ø7...10.5mm
Type of light source	Integrated AC LED module, microwave motion sensor Replaceable (LED only) light source by a professional.
Light control	The luminaire is equipped with a microwave motion sensor, with a twilight switch and motion support
Luminaire weight net / gross	2,9kg / 3,8kg
Box dimensions [cm]	27,5cm x 23cm x 33,5cm
Luminaire dimensions [cm]	21cm x 13cm x 31cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 4K (Datasheet)
External control	Microwave motion sensor HC005S (User manual)
Light source wattage	9,5W
Luminaire wattage	9,5W
Lamp luminous flux	1150lm
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF 0,9
THD factor	30 %
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	2,98A / 34,07µs

Spare parts

ZS671zx0009	Repair kit.

Files to download

Manual

Indexes

Index	Color	RAL
672BL	BLACK	9005
672GA	HOT-DIP GALVANIZING	-
672ST	STAINLESS STEEL	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire