
NORLYS CONCRETE FOUNDATION 7672

Concrete foundation
7672ZX0009
16.09.2026 v.09.49
www.norlys.no



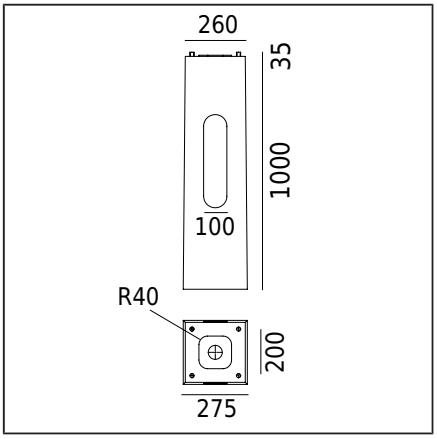

Type of accesory

Type of accessory	Accessories - concrete foundation
Characteristics of the accessory	Concrete foundation TYPE B-51 for embedding in the ground. Used for poles up to a maximum height of 7m, depending on standards and construction regulations applicable in the respective region.

General information

Materials	Galvanized steel, concrete
Mounting method	Installation should be carried out in accordance with the attached instructions. The article is intended for the installation of poles with a bolt spacing of 200x200 and M18 threading. The bolt height above the concrete level h=35 mm. Equipment: - galvanized flat washer x4 pcs. - galvanized spring washer x4 pcs. - galvanized nut M18 x4 pcs. - plastic cap x4 pcs. The foundation is secured with an asphalt emulsion. WARNING: the selection of the type and dimensions of the foundation is always dependent on the installation conditions, and the responsibility for correct selection, in accordance with the Building Law, lies with the designer.
Type of accesory	Anchor bolt for embedding in concrete
Accessory weight net	125kg
Accessory dimensions [cm]	275cm x 275cm x 1000cm

Luminaires sold separately

2000 Lamppost	2655 Lamppost	2656 Lamppost	2657 Lamppost
2658 Lamppost	3004 Lamppost	3005 Lamppost	

Files to download

Manual

Indexes

Index	Color	RAL
7672ZX		-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE